

ADJUSTABLE VOLUME AUTOMATIC PIPETTES

release date 11-07-2013



RADWAG Pipettes by Capp is a brand new line up of pipettes designed with the use of advanced materials, contributing to creation of the most ecological pipettes, currently available in the market.


Our pipettes represent the new line of „liquid handling products” designed for fast measurement and transfer of low volume liquids. Exceptional accuracy combined with the highest accuracy and ergonomic design, with rigid and reliable construction are the main distinctive features of our products. The unique mechanism of the pipette ensures unprecedented accuracy and repeatability with reduced thumb workload.

All the pipettes are inspected for the conformity with the requirements of accuracy and repeatability, according to PN-EN ISO 8655 standard. Each pipette is delivered with a test report containing measurement results, and the manual presents practical tips on pipetting techniques.

Calibration certificates, issued by the accredited calibration laboratory are available on request.

Highlights of RADWAG by Capp pipettes:

- clear and legible display, always maintaining high clarity while pipetting;
- significantly reduced pipetting force;
- large and comfortable tip ejection button;
- option of autoclaving the whole pipette (disassembling not required) - recommended autoclaving process: 20 min in the temperature of 121°C;
- double o-ring offering optimal sealing of the tip;
- full compatibility with majority of tips available in the market;
- robust construction with metal tip cones;
- lowest incidence of breakage resulting from accidental dropping due to high resistance.

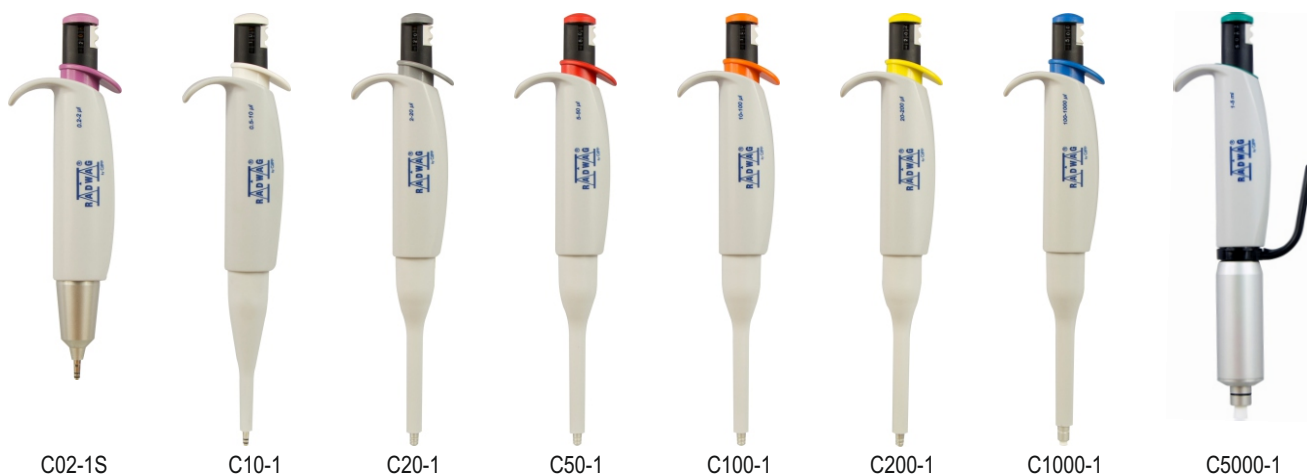

Pipettes parameters:

Model	Volume	Increment	Accuracy error	Repeatability error	Tips	Colour
C02-1S	0,2 µl ÷ 2 µl	0,02 µl	12,00 % / 2,00 %	6,00 % / 1,00 %	10 µl	
C10-1	0,5 µl ÷ 10 µl	0,1 µl	2,50 % / 1,00 %	1,80 % / 0,50 %	10 µl	
C20-1	2 µl ÷ 20 µl	0,2 µl	5,00 % / 1,00 %	1,50 % / 0,30 %	300 µl	
C50-1	5 µl ÷ 50 µl	0,5 µl	2,00 % / 1,00 %	1,20 % / 0,30 %	300 µl	
C100-1	10 µl ÷ 100 µl	1 µl	2,50 % / 0,70 %	1,00 % / 0,20 %	300 µl	
C200-1	20 µl ÷ 200 µl	2 µl	2,50 % / 0,60 %	0,70 % / 0,20 %	300 µl	
C1000-1	100 µl ÷ 1000 µl	10 µl	2,00 % / 0,80 %	0,60 % / 0,20 %	1000 µl	
C5000-1	1000 µl ÷ 5000 µl	50 µl	1,20 % / 0,60 %	0,30 % / 0,15 %	5000 µl	

RADWAG Balances & Scales

26-600 Radom • 28 Bracka Street • POLAND • Phone: +48 48 3848800 • Fax: +48 48 3850010 • www.radwag.com • e-mail: export@radwag.com